




Strainstall

THE WORLD of **load measurement and stress analysis**

**Product**

**Intrinsically Safe Amplifier Type 2506**

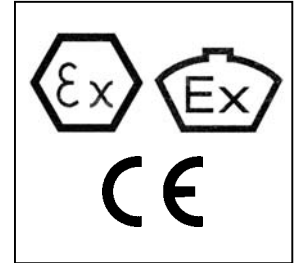

The Type 2506 series Intrinsically Safe (IS) Amplifiers are designed for use with transducer installations either completely in a hazardous area, or connected via Zener barriers or isolators to a safe area.

- **Built-in calibration check via 'Cal' button**
- **4 – 20 mA output**
- **Coarse & fine adjustment on Gain and Zero**
- **DIN-rail mounted**


Available in two versions, the type 2506A is for a full bridge strain gauge inputs with a minimum bridge resistance of 240Ω, whilst the type 2506B is for quarter or half bridge elements, or in structural load measurements with a minimum gauge resistance of 120Ω.

For applications using 24V supply with the control instrumentation in the safe area, a positive double-channel barrier rated 28V/240Ω (or 234Ω) with 28V diode return is suitable for all gas groups. Other combinations are available upon request



## Specification

Mounting:	DIN rail TS35 x 7.5 or TS35 x 15	
Supply voltage:	24 VDC @ 65mA max. 12VDC with input limitations	
Selectable input ranges	2506A	0.23 to 3.5 mV/V
	2506B	200 to 3000 $\mu$ e
Frequency response:	0 to 1130 Hz (-3dB)	
Step change response:	95% of final value in 400 $\mu$ s	
Noise:	50 $\mu$ V max. peak-peak referred to input	
Bridge supply:	8.0 VDC regulated	
Output:	4-20 mA into 50-270 $\Omega$	
Temperature range:	-20 $^{\circ}$ to +60 $^{\circ}$ C	

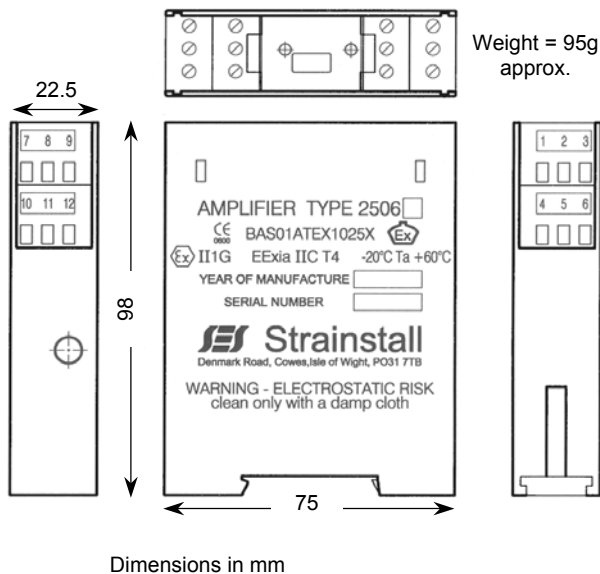

The following table lists the approval certificates and drawings that have been published for the amplifier (the A and B variants are covered by the same certification, as they differ only in passive input components). Copies of these documents are obtainable from Strainstall.

Apparatus Approval to BS EN50014 and BS EN50020	System Approvals to BS EN50039	
	Gas Group & Barrier Type	Approval Cert. No.
BAS01ATEX1025 X (EExiaIIC T4)	IIC (Zener)	Ex01E203 1
	IIB (Zener)	Ex01E203 2
	IIC (Isolator)	Ex01E203 3

### Safety Parameters (Certified Figures)

$U_i = 30V$        $C_i = 0$   
 $I_i = 300mA$      $L_i = 0.1mH$   
 $P_i = 1.2W$        $L_i/R_i = 19\mu H/W$

STRAINSTALL's team of experienced engineers operates from offices in Cowes, Bath and Aberdeen (UK) and Tønsberg (Norway). For further information, please contact:

**Strainstall UK Ltd.**  
 9-10 Mariners Way  
 Cowes  
 Isle of Wight PO31 8PD  
 United Kingdom

Tel: +44(0)1983 203600  
 Fax: +44(0)1983 291335  
 Email: sales@strainstall.com

Due to continuous development, Strainstall UK reserve the right to change specification without notice.

[www.strainstall.com](http://www.strainstall.com)